


# Mounting

General mounting instructions for battery Quartz regular and pendulum movements

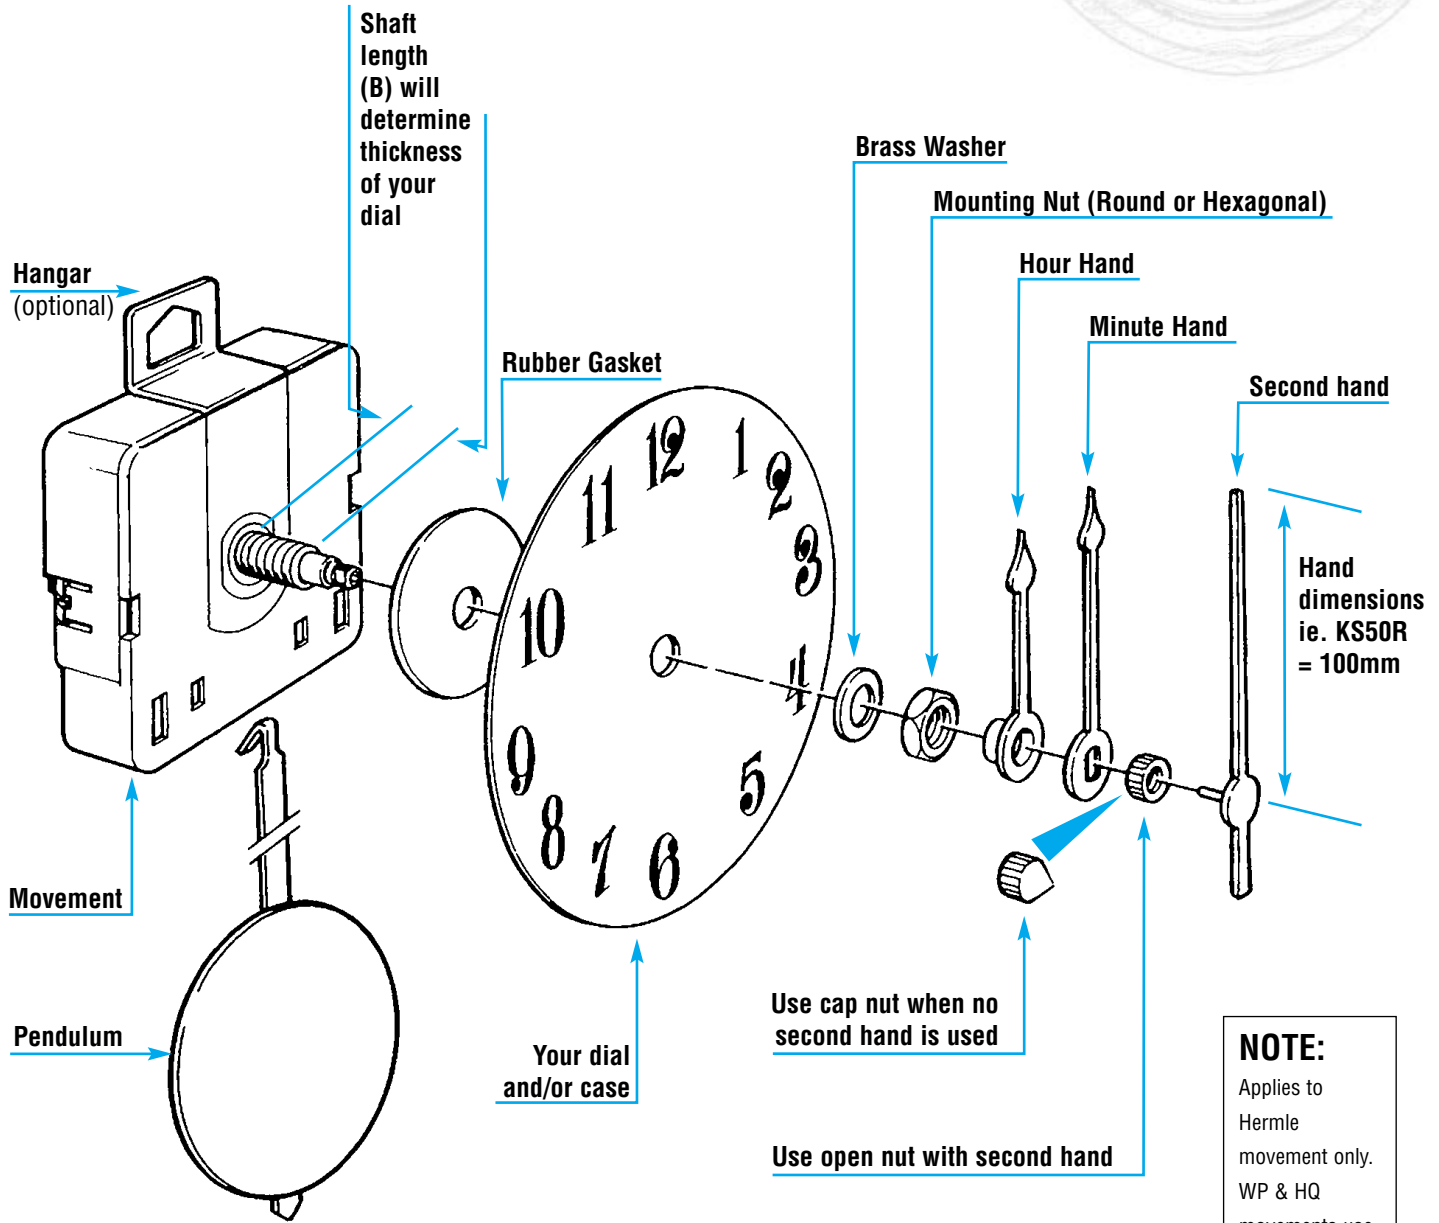

**NOTE:**  
Applies to Hermle movement only. WP & HQ movements use press on hands so **DO NOT** use cap or nut.

Typical assemble - Actual hardware may differ

## HINTS:

- Select hands and movement to be used **BEFORE** making your clock.
- If using pottery dial make hole for movement larger than normally required as clay will shrink during firing.
- Do not over tighten mounting nut as this may damage the movement.
- Set hands at 12.00 O'Clock when installing for the first time. This will ensure correct alignment.
- Rotate hands around dial after assembly. Ensure hands clear the face, any applied numerals, and other hands at all times.

PO Box 17 230  
Auckland  
New Zealand  
Phone: 64 9 634 6633  
Fax: 64 9 634 6633  
email: sales@timeworx.co.nz  
web: www.timeworx.co.nz